


Two-Way-Diverter Valve WET




SINGLE CHANNEL DIVERTER VALVE FOR GRANULAR PRODUCTS


- _ In spherical design with 90° outlet
- _ Developed for conveying lines for silo feeding at up to 6 barg

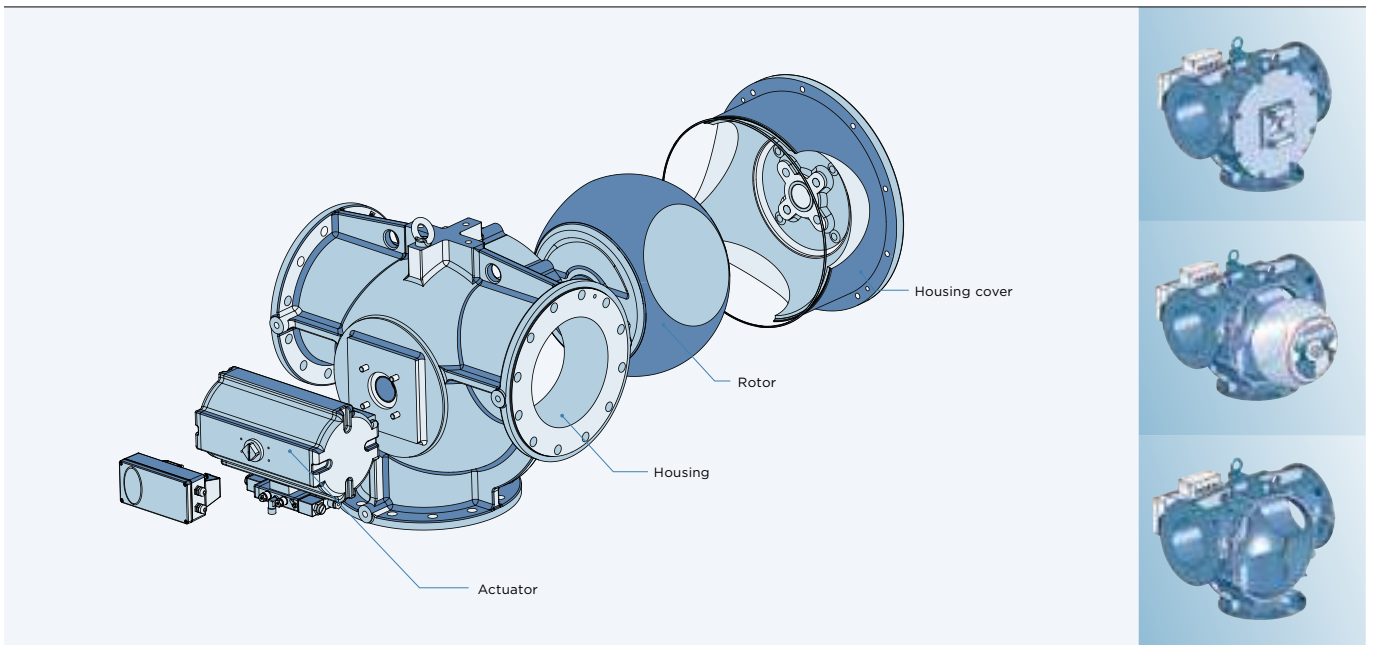

Straight through



Diverted




DIVERTER VALVE FOR GRANULAR PRODUCTS | WET

PRESSURE RANGE 6 barg (87 psi) system and differential pressure
PRESSURE SURGE PROOF (OPTIONAL) 10 barg (145 psi) due to heavy duty design (on request)
OPERATION TEMPERATURE -20°C up to 100°C
APPLICATION Suitable for fluid group 2 according PED (fluid group 1 on demand)
SEAL CONFIGURATION Seal free, tight clearance between rotor and housing
MATERIAL OF CONSTRUCTION Cast aluminium, product wetted parts hard coated

OPTIONS AND ACCESSORIES

- _ Applicable in Ex-Zones with additional accessories
- _ Cross seal between the outlets
- _ Product wetted parts out of stainless steel
- _ Quick-cleaning design
- _ Switchable with product (individual approval required)

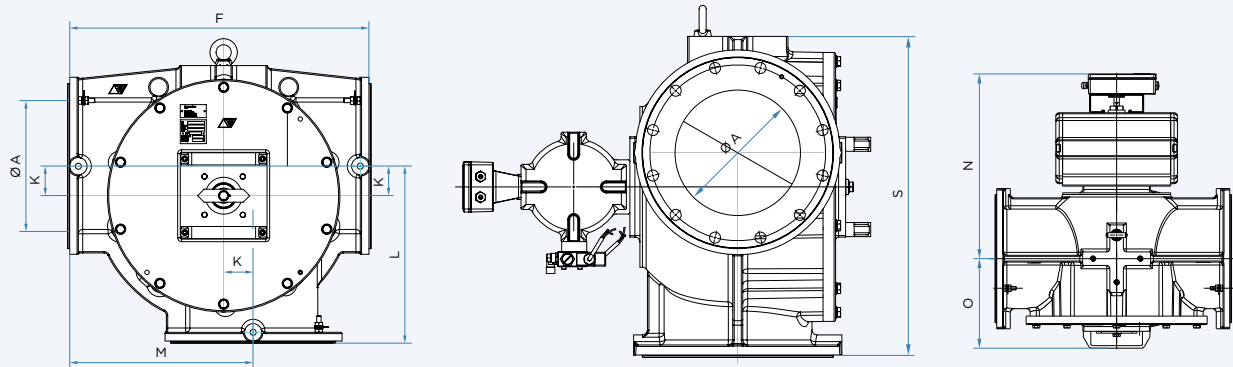

Shown with actuator on left-hand side

	Inlet*/Outlet*		Ø A	Other dimensions							Weight appr. kg
	A (DIN)	A (ANSI)		F	K	L	M	N	O	S	AL
WET 150/162	ND 150	6"	150/162	500	48	288	308	405	180	440	70
WET 187	ND 175	7"	187	600	58	348	368	428	211	540	110
WET 200/213	ND 200	8"	200/213	600	58	348	368	428	211	540	110
WET 250/265	ND 250	10"	250/265	700	68	408	428	548	265	640	170
WET 300/316	ND 300	12"	300/316	800	85	475	495	590	290	740	250
WET 350	ND 350	14"	350	900	95	545	545	610	310	850	350

Dimensions in mm

* Drilled according to DIN PN 10 or ANSI 150 lbs